



AGCO Power 33 MD

EU Stage V / US Tier 4F
compliant diesel engine.

Technical information

Technical data 33 MD

Emission level	EU Stage V
Number of cylinders	3
Bore / stroke	108 / 120 mm
Displacement	3,3 L
Rated speed	2200 RPM
Max.power	78 kW
at speeds	2000 - 2200 RPM
Max.torque	380 Nm
at speeds	1500 RPM
Turbocharger technology	eWastegate
EAT technology	DOC + DPF + SCR

Dimensions

Length (A)	625 mm
Width (B)	580 mm
Height (C)	1108 mm

Information on different performance options available upon request




Compact but powerful

The AGCO Power MD family is optimized for cost effectiveness to provide good value with reasonable cost. The MD family has proven reliability from several continents. 33 MBTN engine allows simple installation, and the advanced controls ensure high performance even in harsh conditions.

Main advantages

- Global product applicable for use in all emission levels.
- Straightforward and compact design allows good access on top of the engine and simplifies maintenance and installation work.
- HVO compatibility (up to 75% less GHG emissions) enables sustainable performance without compromise.

Power curves may be subject to change.

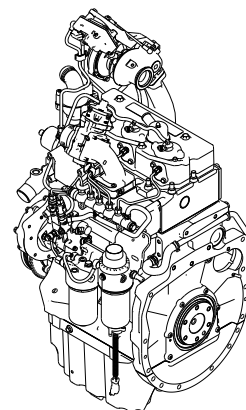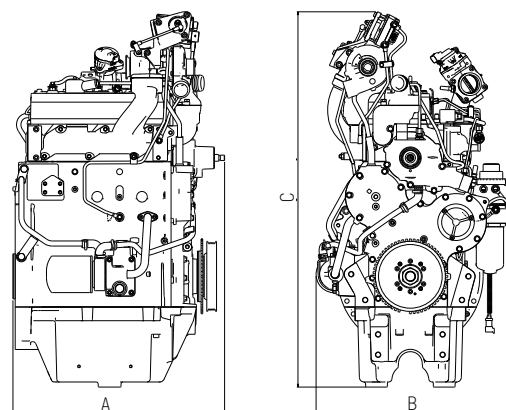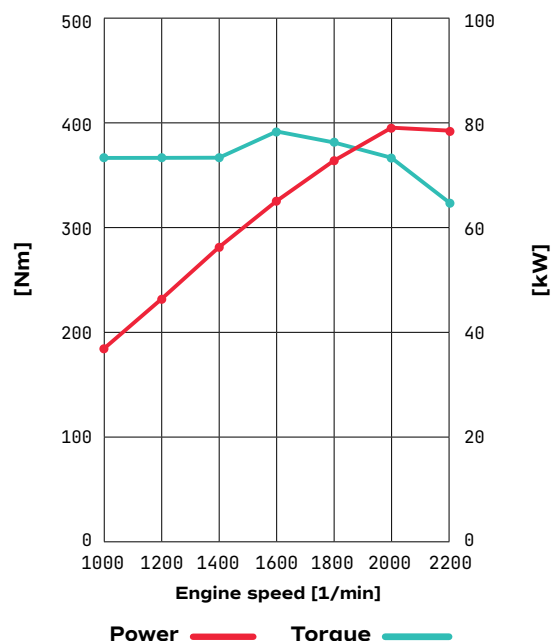

AGCO Power Inc.

Moottorikatu 7 - 10, FI-37240 Linnavuori

NOKIA, FINLAND

Tel. +358 20 786 3600

sales.agcopower@agcocorp.com

agcopower.com



Scan the QR code
to discover more
about AGCO Power

